


### SPECIFICATIONS

Current Rating: 3A AC,DC  
 Voltage Rating: 500V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 100MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Material: Nylon 66,UL94V-0  
 Color: White

### Ordering Information & Dimensions

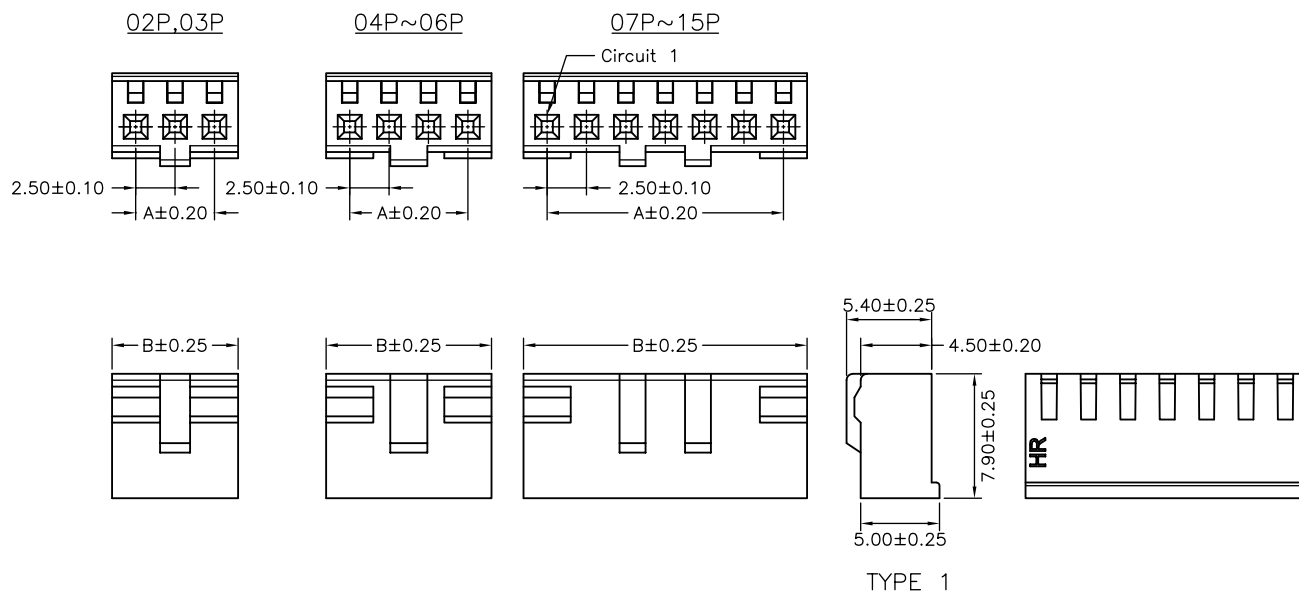

PART NO.	Dimensions	
	A	B
A2500H-02P-N11	2.50	5.50
A2500H-03P-N11	5.00	8.00
A2500H-04P-N11	7.50	10.50
A2500H-05P-N11	10.00	13.00
A2500H-06P-N11	12.50	15.50
A2500H-07P-N11	15.00	18.00
A2500H-08P-N11	17.50	20.50
A2500H-09P-N11	20.00	23.00
A2500H-10P-N11	22.50	25.50
A2500H-11P-N11	25.00	28.00
A2500H-12P-N11	27.50	30.50
A2500H-13P-N11	30.00	33.00
A2500H-14P-N11	32.50	35.50
A2500H-15P-N11	35.00	38.00

			<b>JOINT TECH ELECTRONIC IND. CO., LTD.</b> <b>JOY DAY INDUSTRIAL CO., LTD.</b>				
			UNIT	SCALE	SHEET	TITLE:	
			mm		1 of 1	<b>2.50mm PITCH HOUSING, COLOR: WHITE</b>	
			DRAWN BY	APPROVED BY			
			歐陽小強 2008.09.15	謝瑞清 2008.09.15			
			GENERAL TOLERANCE				
			X. X±0.25	ANGLE±			
			X. XX±0.15				
			X. XXX±0.05				
A0	NEW RELEASE	2008.09.15					DRAW NO. :
REV.	DESCRIPTION	DATE					A2500H-XP-N11
						REV.	
						A0	