






SPECIFICATIONS

Current Rating: 2A AC,DC
 Voltage Rating: 125V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66,UL94V-0
 Color: White

P/N LEGEND

C2003HF		-XP	N	0	W	NP	N	01	G
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩
① Series No.									
② Connector type: HF=RECEPTACLE									
③ No. of circuits									
④ N=Halogen Free									
⑤ Material: 0=NY66,UL94V-0									
⑥ Color: W=White									
⑦ Plating Code: NP=Non-plating									
⑧ Plating Code: N=Non-plating									
⑨ Option code: 00=Standard 01=NY66 15%GF									
⑩ Packing code: G=Bag									

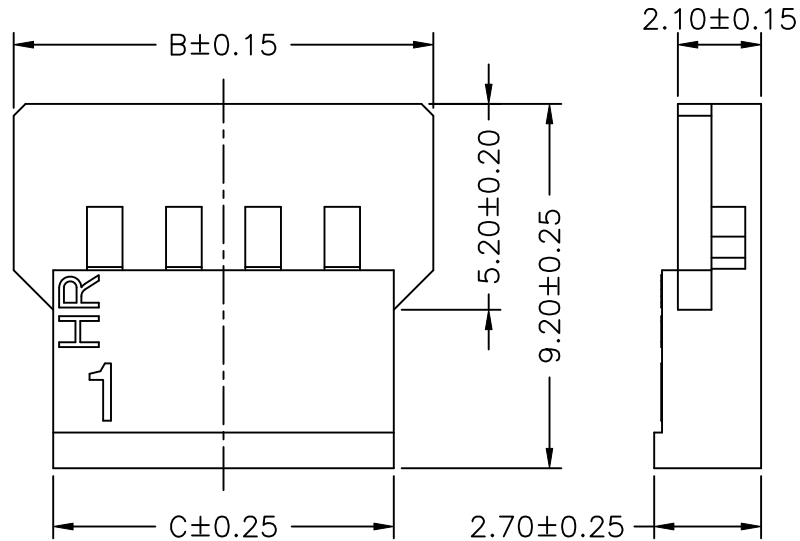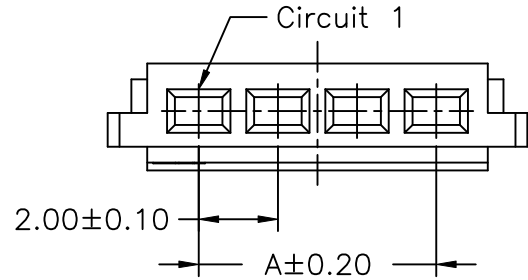

Ordering Information & Dimensions

Circuit NO.	Dimensions		
	A	B	C
02P	2.00	6.60	4.60
03P	4.00	8.60	6.60
04P	6.00	10.60	8.60
05P	8.00	12.60	10.60
06P	10.00	14.60	12.60
07P	12.00	16.60	14.60
08P	14.00	18.60	16.60
09P	16.00	20.60	18.60
10P	18.00	22.60	20.60
11P	20.00	24.60	22.60
13P	24.00	28.60	26.60

				燦達電子工業股份有限公司 JOINT TECH ELECTRONIC IND. CO., LTD.	
UNIT		SCALE	SHEET		TITLE:
mm		1 : 1	1 of 1		
DRAWN BY		APPROVED BY		2.00mm PITCH HOUSING-RECEPTACLE	
向瑞 2016.12.02		謝瑞清 2016.12.02			
GENERAL TOLERANCE					
X. X±0.25		ANGLE±		DRAW NO. : C2003HF-XPNXXXXXXXXX	
X. XX±0.15		▽			
X. XXX±0.05		⊕		REV. A0	
A0	NEW RELEASE	2016.12.02	向瑞		
REV.	DESCRIPTION	DATE	NAME		