



P/N LEGEND

C2003HM										-XP	N	0	W	NP	N	00	G
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩								
① Series No.																	
② Connector type: HM=PLUG																	
③ No. of circuits																	
④ N=Halogen Free																	
⑤ Material: 0=NY66																	
⑥ ColorW=White																	
⑦ Plating code NP=Non-plating																	
⑧ Plating Code:N=Non-plating																	
⑨ Option code: 00=Standard																	
⑩ Packing code: G=Bag																	

SPECIFICATIONS

Current Rating: 2A AC,DC
 Voltage Rating: 125V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

DETAIL "A"
 SCALE 4:1

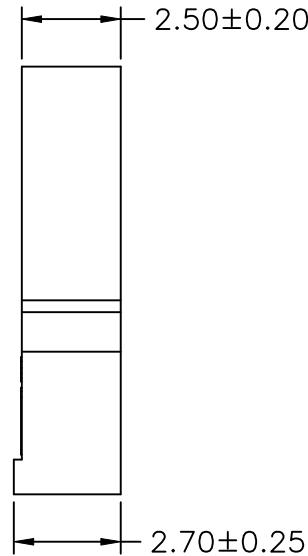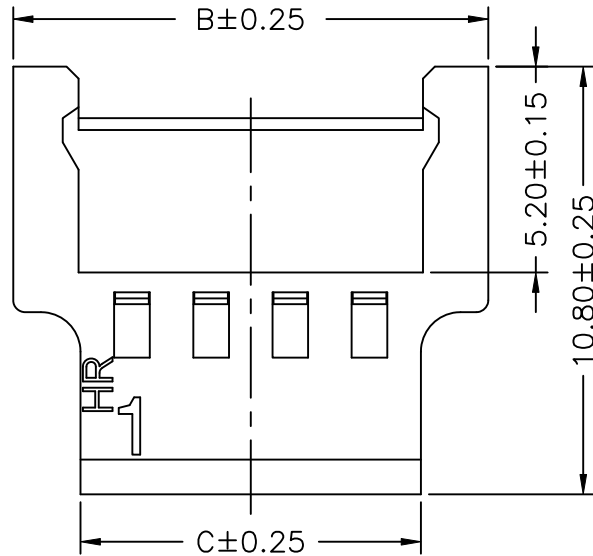

Circuit No.	Dimensions		
	A	B	C
02P	2.00	8.00	4.60
03P	4.00	10.00	6.60
04P	6.00	12.00	8.60
05P	8.00	14.00	10.60
06P	10.00	16.00	12.60
07P	12.00	18.00	14.60
08P	14.00	20.00	16.60
09P	16.00	22.00	18.60
10P	18.00	24.00	20.60
11P	20.00	26.00	22.60
13P	24.00	30.00	26.60

				燦達電子工業股份有限公司 JOINT TECH ELECTRONIC IND. CO., LTD.			
UNIT		SCALE		SHEET		TITLE:	
mm		1 : 1		1 of 1			
DRAWN BY		APPROVED BY		2.00mm PITCH HOUSING-PLUG			
劉包根		董正一					
2012.06.10		2012.06.10					
GENERAL TOLERANCE							
A1	EN1608090003	2016.08.10	徐富永	X.X±0.25	DRAW NO.: C2003HM-XPNXXXXXXXXX		
A0	NEW RELEASE	2012.06.19	劉包根	X.XX±0.15			
REV.	DESCRIPTION	DATE	NAME	X.XXX±0.05	REV. A1		