

Ordering code

C3030	WV-F-2XNP	N	L	X	XX	N	00	B		
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪

① Series No.  
 ② Connector type: WV=Vertical  
 ③ Mounting type: F=With foot  
 ④ No. of circuits  
 ⑤ N=Halogen Free  
 ⑥ Material: L=LCP,UL94V-0  
 ⑦ Color: N=Natural ; B=Black  
 ⑧ Plating code for contacts: G1=Gold-flash  
 T1=Tin-plated  
 ⑨ Plating code for solder tabs: N=Non-plating  
 ⑩ Option code: 00=Standard  
 ⑪ Packing code: B=Tray

SPECIFICATIONS

Current Rating: 5A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Pin Material: Brass


Ordering Information & Dimensions

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
2X01P	---	6.65	2X07P	18.00	24.65
2X02P	3.00	9.65	2X08P	21.00	27.65
2X03P	6.00	12.65	2X09P	24.00	30.65
2X04P	9.00	15.65	2X10P	27.00	33.65
2X05P	12.00	18.65	2X11P	30.00	36.65
2X06P	15.00	21.65	2X12P	33.00	39.65


				燦達電子工業股份有限公司 JOINT TECH ELECTRONIC IND. CO., LTD.	
UNIT		SCALE	SHEET		TITLE:
mm		1 : 1	1 of 2		
DRAWN BY		APPROVED BY		<b>3.00mm PITCH 180° WAFER,          MICRO-FIT</b>	
郭木恩		陳彥兆			
2014.04.03		2014.04.03			
GENERAL TOLERANCE		ANGLE±			
A2	EN1606130001	2016.08.22	徐富永	X.X±0.25	DRAW NO. : C3030WV-F-2XNPXXXXXXB
A1	EN1409020004	2014.09.02	郭木恩	X.XX±0.15	
A0	NEW RELEASE	2014.04.03	郭木恩	X.XXX±0.05	
REV.	DESCRIPTION	DATE	NAME		




2X01P




2X05P




2X09P

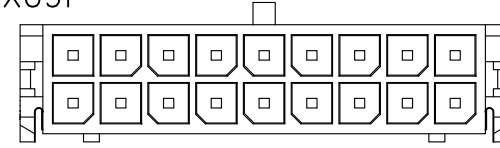


2X02P




2X06P




2X10P

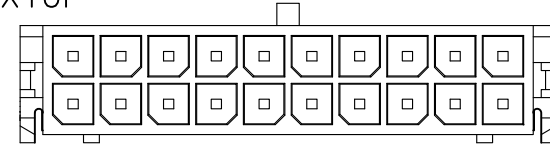


2X03P




2X07P

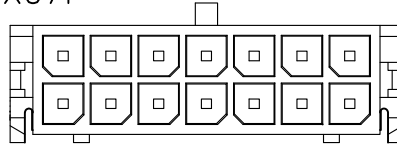


2X11P

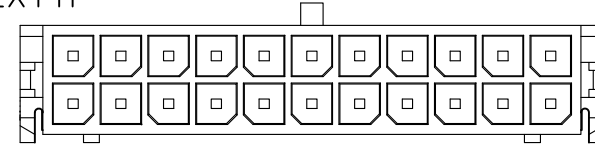


2X04P



2X08P

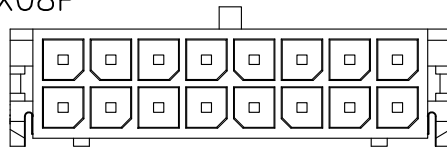

2X12P

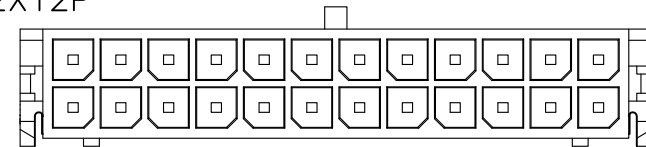

燦達電子工業股份有限公司  
JOINT TECH ELECTRONIC IND. CO., LTD.

UNIT SCALE SHEET  
mm 1 : 1 2 of 2

DRAWN BY APPROVED BY  
郭木思 陳彥兆  
2014.04.03 2014.04.03

GENERAL TOLERANCE

A2	EN1606130001	2016.08.22	徐富永	X.X±0.25	ANGLE±
A1	EN1409020004	2014.09.02	郭木思	X.XX±0.15	
REV.	DESCRIPTION	DATE	NAME	X.XXX±0.05	

TITLE:  
3.00mm PITCH 180° WAFER,  
MICRO-FIT

DRAW NO. : C3030WV-F-2XNPNXXXXXXB REV. A2